



# AC/DC 整机工控电源

## JWAK 整机工控电源系列--35W 四路输出

JWAK Switching Power Supply Series--35W Quade Output

### 典型性能 Typical Performance

- ◆ 外形尺寸: 110\*78\*36 (mm)  
Dimension: 110\*78\*361 (mm)
- ◆ 宽输入电压范围  
Wide range input voltage
- ◆ 高效率、高功率密度、低纹波  
High efficiency、High power density、Low ripple & noise
- ◆ 105°C长寿命电解电容  
105°C long life electrolytic capacitors
- ◆ 高可靠性、三年保修  
High reliability、three-year warranty
- ◆ 安规: EN60950  
Ann rules: EN60950



### 输入特性 Input Features

输入电压范围 Input voltage range	W:85~265VAC 120~370VDC N:165~265VAC 230~370VDC	110VAC 220VAC
输入电压频率 Input voltage frequency		47~63Hz
输入冲击电流 Inrush current	230VAC 冷启动 230VAC Cold start,	≤30A

### 输出特性 Output Features

输出电压精度 Voltage tolerance	标称电压 Nominal voltage	$V_{O1} \leq \pm 1\%$ (3.3V、5V $\leq \pm 2\%$ ) , $V_{O2}、V_{O3} \leq \pm 3\%$ , $V_{O4} \leq \pm 6\%$
电压调整率 Line regulation (full load)	输入电压从低端到高端变化 Change of input voltage from lowend to highend	$V_{O1} \leq \pm 0.5\%$ , $V_{O2}、V_{O3}、V_{O4} \leq \pm 1.5\%$
负载调整率 Load regul	20%~100%负载变化 20%~100% Load change	$V_{O1} \leq \pm 0.5\%$ , $V_{O2}、V_{O3} \leq \pm 3\%$ , $V_{O4} \leq \pm 6\%$
温度系数 Temperature coefficient		±0.02%/°C
过功率保护 Output overload Protection		115~150%额定电流,自恢复 115~150%rated output power, auto recovery
短路保护 Short Circuit Protection		长期, 自恢复 Long-term, auto recovery
效率 Efficiency	输入标称电压、满载 Input rated voltage、Full load	76% (典型值) 75%(typical)
启动时间 Rise time	220VAC 满载 220VAC Full load	500mS (典型值) 500ms (typical)
保持时间 Hold up time	220VAC 满载 220VAC Full load	80mS (典型值) 80ms (typical)

### 一般特性 General Features

隔离耐压 Withstand voltage	输入对输出、输入对地 I/P-O/P、I/P-F/G 输出对地 O/P-F/G 输出对输出 (隔离) O/P-O/P( (1分钟, 漏电流 $\leq 5mA$ ) (1Mintute leakage current) $\leq 5mA$ )	1500VAC 500VAC 500VDC
绝缘电阻 Isolation resistance	500V	$\geq 50M\Omega$
MTBF	环境 25°C Environment 25°C	$2.0 \times 10^5$ Hrs
工作温度 Operating temperature	55°C以上降额使用 Above 55°C derating make	-25°C~70°C (-40°C~70°C)
储存温度 Storage temperature		-40°C~85°C
工作相对湿度 Operating humidity	无凝露及结冰现象 (non condensing)	10%~90%RH
储存相对湿度 Storage humidity	无凝露及结冰现象 (non condensing)	5%~95%RH
冷却方式 Cooling method		自然冷却 Convection

## 命名方式 Naming Rules

JWAK- 35 S 5 D12 S24 W(N)I

隔离输出  
Isolate output  
输入电压范围 (W:85~265V, N:165~265V)  
Input voltage range (W:85~265V, N:165~265V)  
输出电压  $V_{o4}$   
Output voltage  $V_{o4}$   
输出电压  $V_{o2}$ 、 $V_{o3}$  共地输出  
Output voltage  $V_{o2}$ 、 $V_{o3}$  common-GND output  
输出电压  $V_{o1}$   
voltage  $V_{o1}$   
输出功率  
Output power  
AC/DC 工控电源  
AC/DC Switching Power Supply

## 产品选型 Product Selection Table

产品型号 Model No.	输出电压 Output voltage $V_o$	输出电流 Output current $I_o$	输出电压精度 Output voltage tolerance	纹波噪声 R&N $V_{(P-P)mV}$	效率 Efficiency
JWAK-35S5D12S-5W(N)I	+ 5V	0.5~4.0A	±2%	80mV	75%
	+12V	0.1~0.5A	±5%	100mV	
	-12V	0.1~0.5A	±3%	100mV	
	+5V	0.1~0.6A	±3%	80mV	
JWAK-35S5D12S24W(N)I	+ 5V	0.5~3.0A	±2%	80mV	77%
	+12V	0.1~0.5A	±3%	100mV	
	-12V	0.1~0.5A	±3%	100mV	
	+24V	0.1~0.3A	±5%	120mV	
JWAK-35S5D12S12W(N)I	+ 5V	0.5~3.0A	±2%	80mV	76%
	+12V	0.1~0.5A	±5%	120mV	
	-12V	0.1~0.5A	±5%	100mV	
	+12V	0.1~0.5A	±5%	100mV	
JWAK-35S5D12S15W(N)I	+ 5V	0.5~3.0A	±2%	80mV	76%
	+12V	0.1~0.5A	±5%	120mV	
	-12V	0.1~0.5A	±5%	120mV	
	+15V	0.1~0.5A	±5%	120mV	
JWAK-35S5D15S-5W(N)I	+ 5V	0.5~3.0A	±2%	80mV	76%
	+15V	0.1~0.5A	±5%	120mV	
	-15V	0.1~0.5A	±5%	120mV	
	+5V	0.1~1.0A	±5%	80mV	
JWAK-35S5D15S12W(N)I	+ 5V	0.5~3.0A	±2%	80mV	77%
	+15V	0.1~0.5A	±5%	120mV	
	-15V	0.1~0.5A	±5%	120mV	
	+12V	0.1~0.4A	±5%	120mV	


注：1、纹波噪声测试方法：使用一根 12” 双绞线，在终端并联 0.1uF 和 47uF 电容，在 20MHz 带宽下测试。

2、因篇幅有限，以上只是部分产品列表，若需列表以外产品，请与本公司销售部联系。

Note: 1、 Ripple & noise are measured at 20MHz of bandwidth by using a 12"twisted pair-wire terminatedwith a 0.1uF & 47uF parallel capacitor

2、Due to space limitations ,the above list is only for some products, If other than a list of products, please contact the Company's sales department.

## 安装尺寸图 Mechanical Data

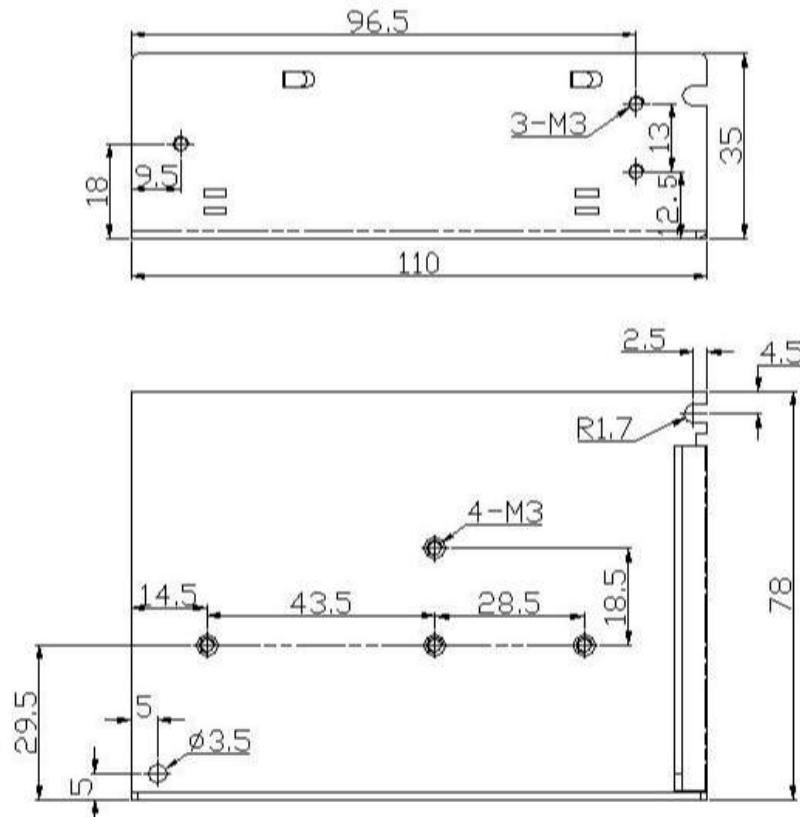

注：电源安装尺寸如与选型手册不符，请以实物尺寸为准。

Note: Power mechanical data does not match with the hand book, Please refer to product size.