



# DC/DC 电源模块

## JWDB--30W 单路输出 B 型封装系列

JWDB--30W single output B Package type series

### 典型性能 Typical Performance

- ◆ 外形尺寸: 25.4\*50.8\*10.16 (mm)  
Dimension: 25.4\*50.8\*10.16 (mm)
- ◆ 宽输入电压范围 (2: 1 输入电压范围)  
Wide range input voltage (2: 1range input voltage)
- ◆ 105°C长寿命电解电容  
105°C long life electrolytic capacitors
- ◆ 高效率、高功率密度、低纹波  
High efficiency、High power density、Low ripple & noise
- ◆ 黑金属外壳，八面屏蔽，通孔安装  
Black metal shell, Eight face shield, Hole is installed
- ◆ 安规: EN60950  
Ann rules: EN60950



### 输入特性 Input Features

输入电压范围 Input voltage range	标称 12V Nominal voltage12V 标称 24V Nominal voltage24V 标称 48V Nominal voltage48V 标称 110V Nominal voltage110V	9.5~18VDC 18~36VDC 36~72VDC 72~144VDC
-------------------------------	--	--

### 输出特性 Output Features

输出电压精度 Voltage tolerance	标称电压 Nominal voltage	≤ ±1% (3.3V、5V ≤ ±2%)
电压调整率 Line regulation (full load)	输入电压从低端到高端变化 Change of input voltage from lowend to highend	≤ ±0.5%
负载调整率 Load regul	20%~100%负载变化 20%~100% Load change	V <sub>O</sub> ≤ ±0.5%
纹波噪声 Ripple&Noise	20M 带宽 20M Bandwidth	≤ 1%
温度系数 Temperature coefficient		±0.02%/°C
容性负载 Capacitive load	输入标称电压、满载 Input rated voltage、Fullload	见附表 As per list enclosed
过流保护 Output overcurrent Protection		115~150%额定电流,自恢复 115~150%rated output circuit,auto recovery
短路保护 Short Circuit Protection		长期, 自恢复 Long-term,auto recovery
启动延迟时间 Turn-on delay time	典型值 Typical value	≤ 300mS
过冲幅度 Overshoot	25%额定负载变化 25% rated load change	≤ 500μ S
	Δ V <sub>01</sub> / V <sub>01</sub>	≤ ±5.0%

### 一般特性 General Features

隔离耐压 Withstand voltage	输入对输出 I/P-O/P (1分钟, 漏电流≤5mA ) (1Mintute ,leakage current)≤5mA)	1500VDC
绝缘电阻 Isolation resistance	500V	≥ 100MΩ
MTBF	环境 25°C Environment 25°C	2.0*10 <sup>5</sup> Hrs
开关频率 switching frequency		300KHz
最大壳温 The highest shell temperature	工作环境温度较高时, 需加装辅助散热措施, 确保模块表面温度低于 95°C When working environment temperature is higher, need to add auxiliary cooling measures, to ensure that the surface temperature below 95°C	+95°C
工作温度 Operating temperature	55°C以上降额使用 Above 55°C derating make	-40°C~70°C
储存温度 Storage temperature		-40°C~85°C
工作相对湿度 Operating humidity	无凝露及结冰现象 (non condensing)	10%~90%RH
储存相对湿度 Storage humidity	无凝露及结冰现象 (non condensing)	5%~95%RH
冷却方式 Cooling method		自然冷却 Convection

## 容性负载 Capacitive Load

Vout:5V		Vout:12V、15V		Vout:24V	
推荐值 Recommendations	最大值 Maximum	推荐值 Recommendations	最大值 Maximum	推荐值 Recommendations	最大值 Maximum
1000μF	4700μF	1000μF	2200μF	100μF	470μF

## 命名方式 Naming Rules

JWDB 30 -12 S 5 W

无标注: 输入电压 2:1  
Not marked input voltage range 2:1  
输出电压  
Output voltage  
单路输出  
Single Output  
标称输入电压  
Nominal Input voltage  
输出功率  
Output power  
外形尺寸 50.8\*25.4(mm)  
Dimension 50.8\*25.4(mm)  
DC/DC 电源模块  
DC/DC power module

## 产品选型 Product selection

产品型号 Model No.	输入电压范围 Input voltage V <sub>in</sub>	输出电压 Output voltage V <sub>o</sub>	输出电流 Output current I <sub>o</sub>	纹波噪声 R & N V <sub>(P-P)mV</sub>	效率 Efficiency
JWDB30-12S5	9.5~18V	5V	6.00A	100	83%
JWDB30-12S12		12V	2.50A	120	87%
JWDB30-12S15		15V	2.00A	150	88%
JWDB30-12S24		24V	1.25A	200	88%
JWDB30-24S5	18~36V	5V	6.00A	100	84%
JWDB30-24S12		12V	2.50A	120	87%
JWDB30-24S15		15V	2.00A	150	88%
JWDB30-24S24		24V	1.25A	200	88%
JWDB30-48S5	36~72V	5V	6.00A	100	85%
JWDB30-48S12		12V	2.50A	120	87%
JWDB30-48S15		15V	2.00A	150	885
JWDB30-4824		24V	1.25A	200	88%
JWDB30-110S5	72~144V	5V	6.00A	100	85%
JWDB30-110S12		12V	2.50A	120	87%
JWDB30-110S15		15V	2.00A	150	88%
JWDB30-11024		24V	1.25A	200	88%


注：因篇幅有限，以上只是部分产品列表，若需列表以外产品，请与本公司销售部联系。

输出纹波噪声（峰-峰值）的测量，请参照模块测试说明中介绍的方法进行。

Note: Due to space limitations ,the above list is only for some products, If other than a list of products, please contact the Company's sales department.

Output ripple noise measurement (peak - peak), please refer to the module test notes method is introduced.

## 封装尺寸图 MechanicalData

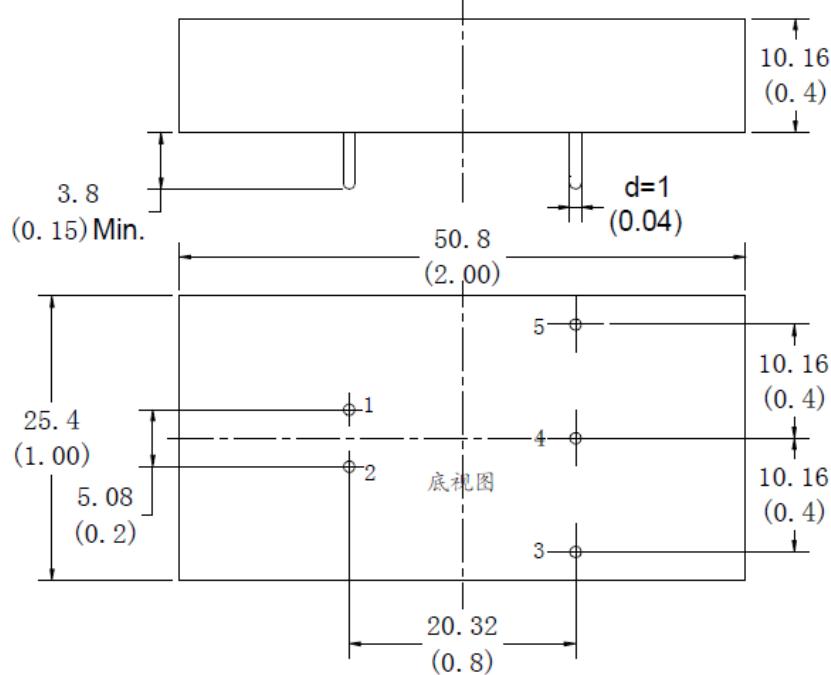

单位: mm(inch)

## 管脚定义 Pin Assignments


P1	P2	P3	P4	P5
Vin+	Vin-	Vo-	NP	V <sub>O+</sub>

注：电源模块的外形尺寸和管脚定义如与选型手册不符，请以实物实际尺寸为准。


Note: Dimensions and pin definitions of power module such as inconsistent with the hand book, please in kind prevail actual size

### 典型曲线 Typical curve

降额曲线  
Derating curve

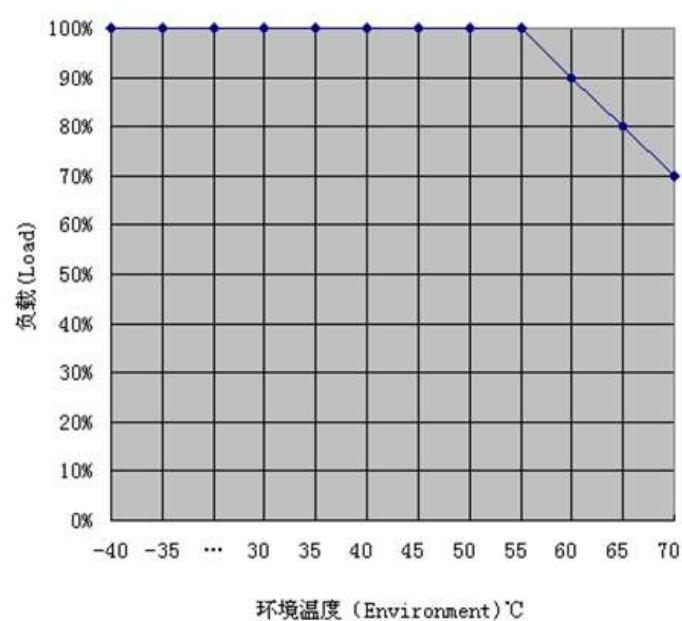

效率曲线  
Efficiency curve

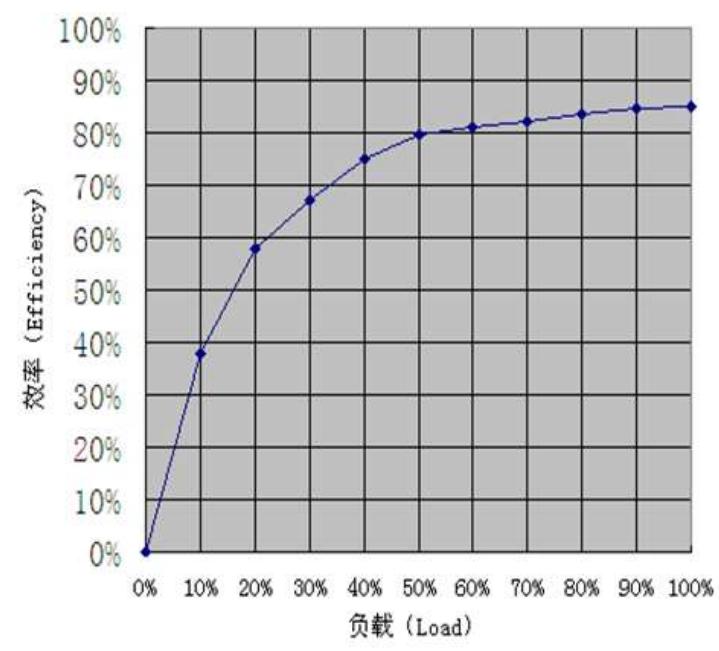

### 纹波噪声测试: (靠测法 20MHz)

测试方法: 纹波&噪声用示波器来测试。测试模块噪声时为了避免引入额外噪声, 须用示波器探头直接接触模块输出引脚

