



DC/DC 铁路机车电源模块

DC/DC Railway locomotive power supply module

JWDR--50W 单路输出系列

JWDR--50W single output series

典型性能 Typical Performance

- ◆ 外形尺寸: 88.9*63.5*17.0 (mm)
Dimension: 88.9*63.5*17.0 (mm)
- ◆ 宽输入电压范围
Wide range input voltage
- ◆ 105℃长寿命电解电容
105℃ long life electrolytic capacitors
- ◆ 高效率、高功率密度、低纹波
High efficiency、High power density、Low ripple & noise
- ◆ 黑金属外壳, 八面屏蔽, 通孔安装
Black metal shell, Eight face shield, Hole is installed
- ◆ 安规: EN60950
Ann rules: EN60950



输入特性 Input Features

输入电压范围 Input voltage range	标称 110V Nominal voltage 110V 标称 110V (W) Nominal voltage 110V(W)	66~160VDC 45~135VDC
遥控端(低电平遥控) Remote ON/OFF(Low level remote)	ON 高电平或悬空工作 Hight level or vacant-Turn on OFF 低电平或接地关断 Low level or connect ground-Turn off	3.5Vdc ~ +Vin ≤ 0.3 Vdc
输入欠压保护 Input undervoltage protection	低于低端输入电压, 电源关断输出, 自恢复 Lower than the low-inputvoltage protection Self-furbish	

输出特性 Output Features


输出电压精度 Voltage tolerance	标称电压 Nominal voltage	$\leq \pm 1\%$ (3.3V、5V $\leq \pm 2\%$)
电压调整率 Line regulation (full load)	输入电压从低端到高端变化 Change of input voltage from lowend to highend	$\leq \pm 0.5\%$
负载调整率 Load regul	20%~100%负载变化 20%~100% Load change	$V_o \leq \pm 0.5\%$
纹波噪声 Ripple&Noise	20M 带宽 20M Bandwidth	$\leq 1\%$
温度系数 Temperature coefficient		$\pm 0.02\%/{^\circ}C$
过流保护 Output overcurrent Protection		115~150%额定电流, 自恢复 115~150%rated output circuit, auto recovery
短路保护 Short Circuit Protection		长期, 自恢复 Long-term, auto recovery
启动延迟时间 Turn-on delay time	典型值 Typical value	$\leq 200mS$
输出电压调节 Voltage adjust	标称输出电压 Nominal output	可调 $\pm 10\%$ Adjustable $\pm 10\%$
过冲幅度 Overshoot	25%额定负载变化 25% rated load change $\Delta V_{oL} / V_o$	$\leq 500\mu S$ $\leq \pm 4.0\%$

一般特性 General Features

隔离耐压 Withstand voltage	输入对输出 I/P-O/P (1分钟, 漏电流 $\leq 5mA$) (1Mintute, leakage current) $\leq 5mA$)	1500VDC
绝缘电阻 Isolation resistance	500V	$\geq 100M\Omega$
MTBF	环境 25°C Environment 25°C	2.0×10^5 Hrs
开关频率 switching frequency		300KHz
最大壳温 The highest shell temperature	工作环境温度较高时, 需加装辅助散热措施, 确保模块表面温度低于 95°C When working environment temperature is higher, need to add auxiliary cooling measures, to ensure that the surface temperature below 95°C	+95°C
工作温度 Operating temperature	70°C 以上降额使用 Above 75°C derating make	-45°C~85°C
储存温度 Storage temperature		-45°C~105°C
工作相对湿度 Operating humidity	无凝露及结冰现象 (non condensing)	10%~90%RH
储存相对湿度 Storage humidity	无凝露及结冰现象 (non condensing)	5%~95%RH
冷却方式 Cooling method		自然冷却 Convection

命名方式 Naming Rules

JWDR 50-110S 5

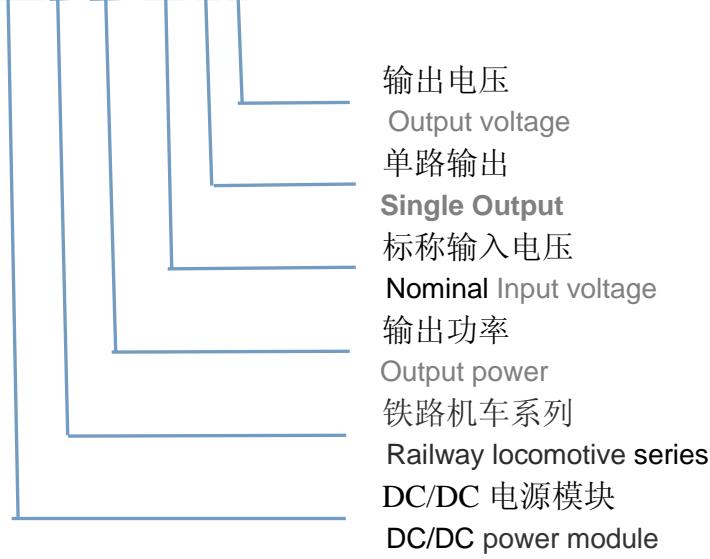

产品选型 Product selection

产品型号 Model No.	输入电压范围 Input voltage V _{in}	输出电压 Output voltage V _o	输出电流 Output current I _o	纹波噪声 R & N V _{(P-P)mV}	最大容性负载 Capacitive load maximum	效率 Efficiency
JWDR50-110S3.3	66~160V	3V	10.00A	50	7500uF	83%
JWDR50-110S5		5V	10.00A	50	6000uF	84%
JWDR50-110S12		12V	4.17A	100	3000uF	86%
JWDR50-110S15		15V	3.33A	100	2200uF	87%
JWDR50-110S24		24V	2.08A	120	1000uF	89%
JWDR50-72S3.3	45~135V	3V	10.00A	50	7500uF	83%
JWDR50-72S5		5V	10.00A	50	6000uF	84%
JWDR50-72S12		12V	4.17A	100	3000uF	86%
JWDR50-72S15		15V	3.33A	100	2200uF	87%
JWDR50-72S24		24V	2.08A	120	1000uF	89%


注：因篇幅有限，以上只是部分产品列表，若需列表以外产品，请与本公司销售部联系。

输出纹波噪声（峰-峰值）的测量，请参照模块测试说明中介绍的方法进行。

Note: Due to space limitations ,the above list is only for some products, If other than a list of products, please contact the Company's sales department.

Output ripple noise measurement (peak - peak), please refer to the module test notes method is introduced.

封装尺寸图 MechanicalData

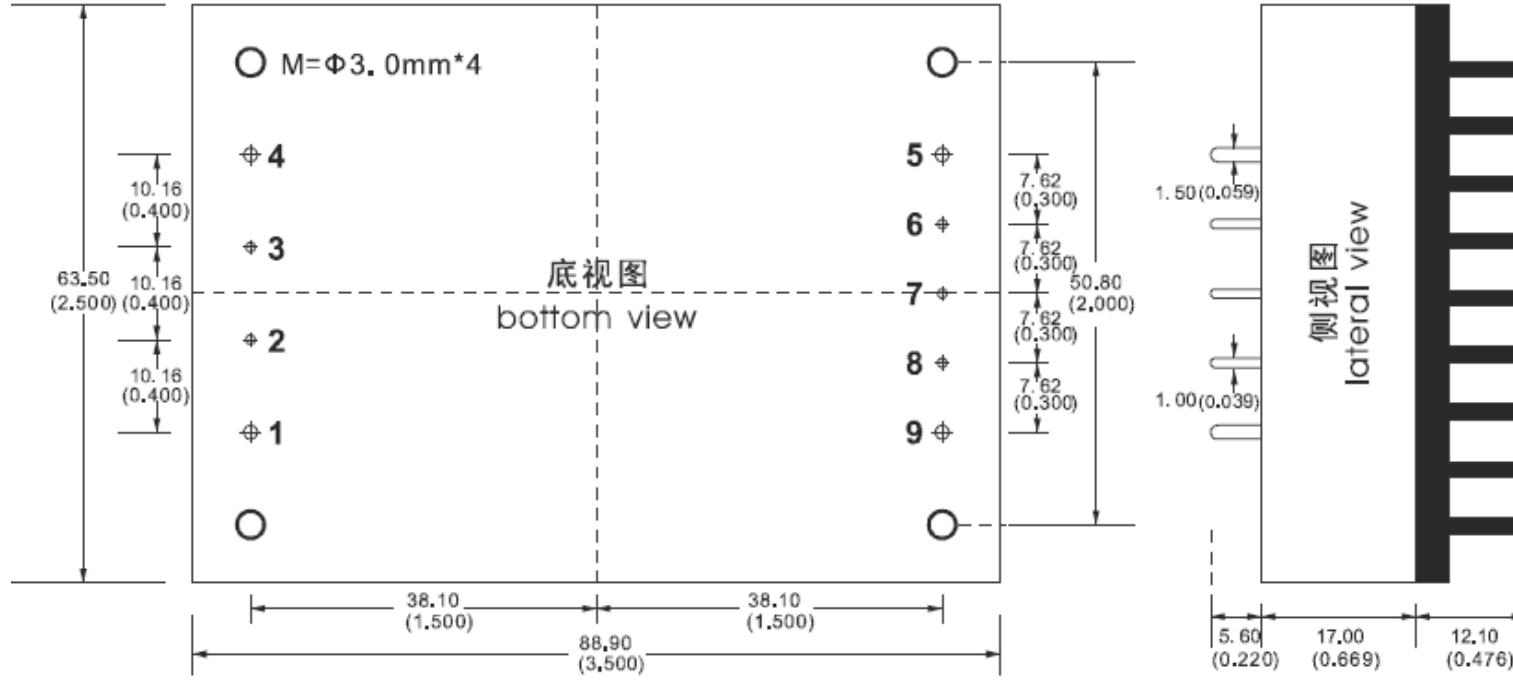

注：1、4、5、9、管脚针为1.5mm, 其余为1mm

Note: 1, 4, 5, 9, pin Φ 1.5mm,others 1mm


管脚定义 Pin Assignments

P1	P2	P3	P4	P5	P6	P7	P8	P9
Vin-	CNT	CASE	Vin+	Vout+	+S	TRIM	-S	GND

注：电源模块的外形尺寸和管脚定义如与选型手册不符，请以实物实际尺寸为准。

Note: Dimensions and pin Dfinitions of power module such as inconsistent with the hand book, please in kind prevail actual size

典型曲线 Typical curve

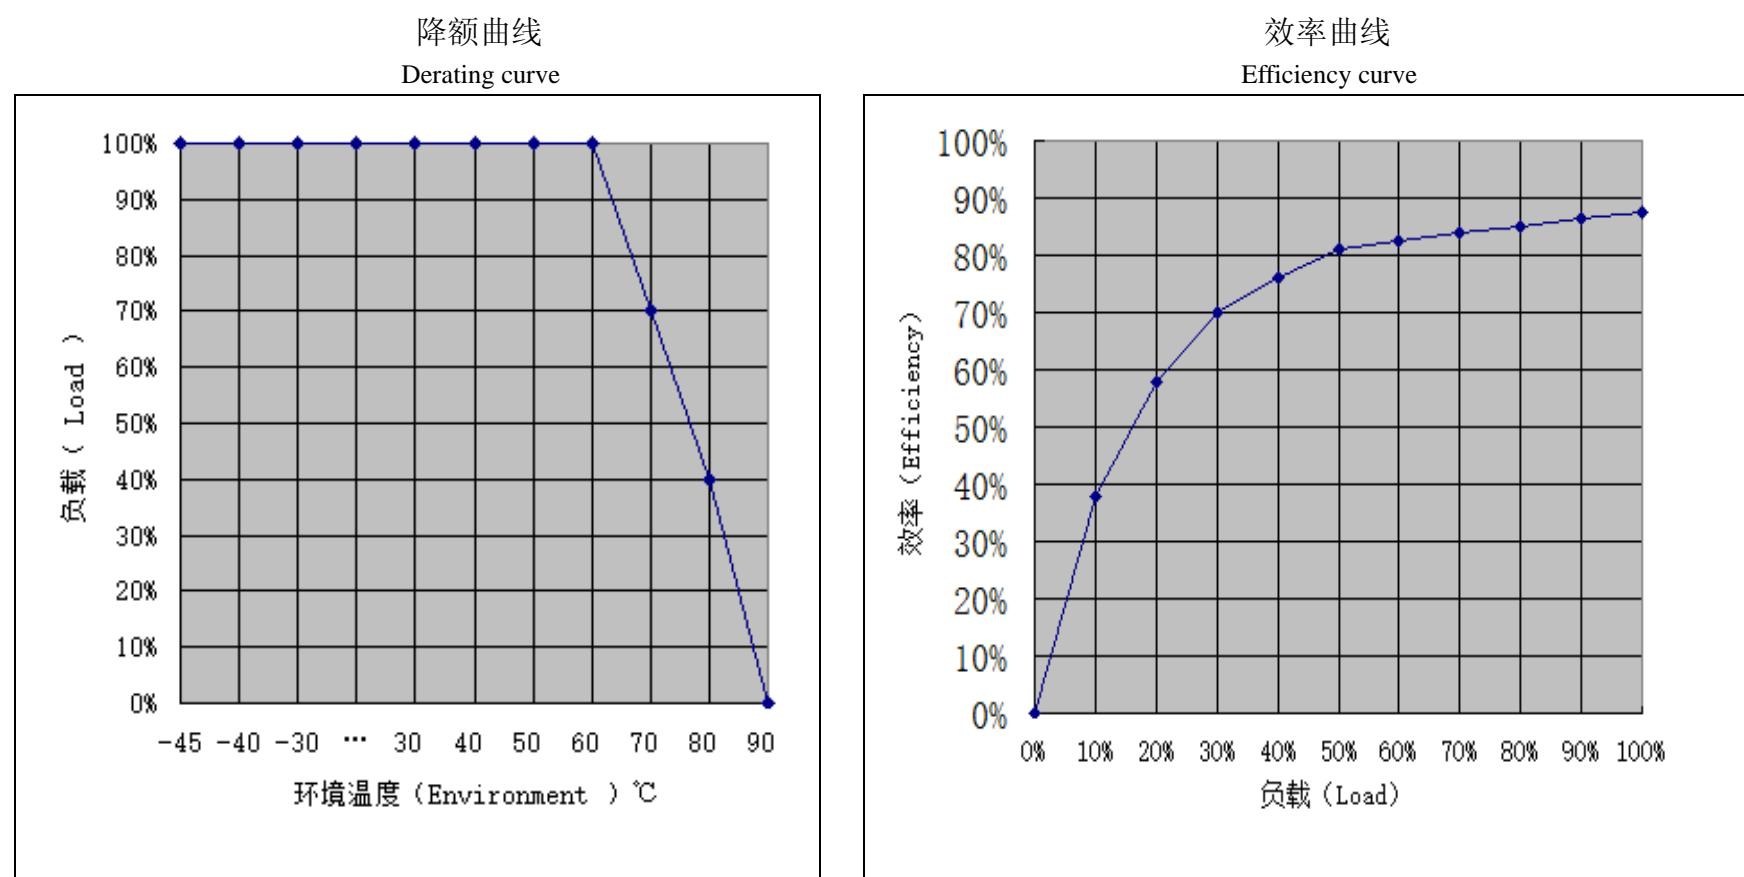

纹波噪声测试: (靠测法 20MHz)

测试方法: 纹波&噪声用示波器来测试。测试模块噪声时为了避免引入额外噪声, 须用示波器探头直接接触模块输出引脚

